


TECHNICAL DATA SHEET

Linen is a beautiful and classic fabric ‘look’, which would complement any interior with a hint of sleek style. Our contemporary Jacana wallcovering is light and fresh with striations and tonal colour variations on the ‘yarns’ to emulate the appearance of natural fibres. The design is popular and very complimentary: charming and refined with a subtle all-over texture in true faith to the natural linen slubs. Available as a Type I non-woven design in 14 highly useable colourways it includes our new Biomaster application which guarantees fast, effective antimicrobial protection for the lifetime of the wallcovering.

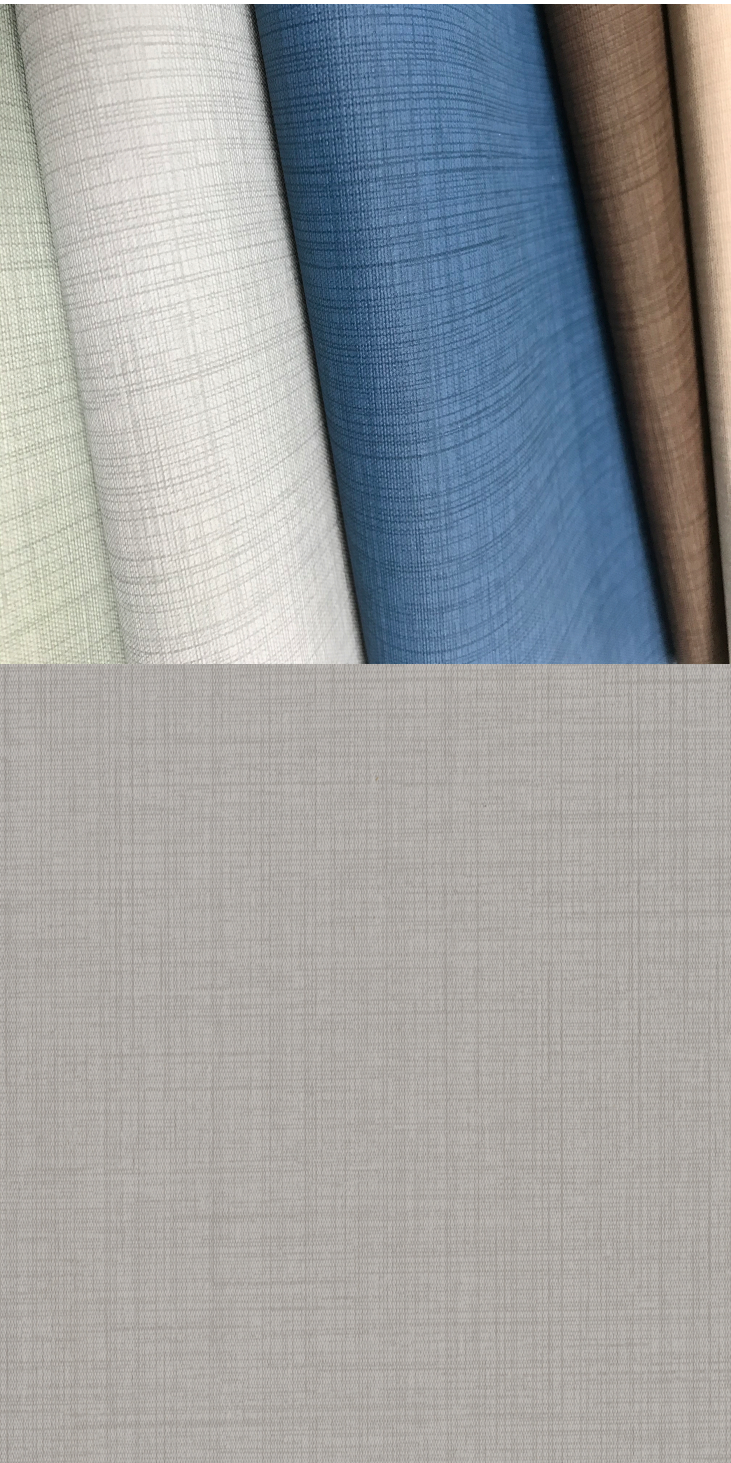

Product Details

| | |
|---------------------|---|
| Design: | Jacana |
| SKU: | 12545 |
| Colour Description: | Grey |
| Width: | 130cm |
| Length: | 30m |
| Sold By: | Per linear metre |
| Construction Type: | Fabric backed Vinyl |
| Backer: | Non Woven Polyester |
| Weight: | 410gsm Type I (18oz) |
| Fire rating: | Euro Class B-s2,d0 Other Fire Certifications available include Russian GOST, Australian AS 5637.1, Chinese 8624 |

CLEANABILITY



Fully Washable

CE COMPLIANT




CONTAINS BIOCIDES



ANTI-BACTERIAL



IMO RATED



BV2690

IMO RATED



8517

LIGHTFASTNESS



Very good. (6 out of 8 to BSEN20105)

VOC RATED

A+

Hanging Information

| | |
|-----------------------|---|
| Pattern Repeat: | 0cm |
| Pattern Offset: | 0cm |
| Pattern Overlap: | 5cm |
| Recommended Adhesive: | Tools: Hard Spatula and Joint Cutter. Adhesive: Murabond Heavy. On dry lining use Murabond Easy Strip. On sealed surfaces use Murabond Sealed Surface Adhesive |

AVAILABLE COLOURWAYS IN THIS DESIGN

To view the full range of colourways available in this design, please search ‘[Jacana](#)’ using the search function tool on the Muraspec website.



Paste to wall



By Reverse Hanging



Random Match



Overlap & Trim

If you require further information about any Muraspec product or service please search our website www.muraspec.com, contact us at customerservices@murasespec.com or call +44 (0)3705 117 118